

The logo features a dark blue, thick, curved swoosh that starts on the left, arches over the top, and tapers to a point on the right. The word "Pace" is written in a bold, italicized, dark blue serif font, positioned centrally within the curve of the swoosh.

Pace



HD User Settings

HD User Settings Menu

- The User Settings can be accessed through the remote control or by using the buttons on the front panel of the unit.
- Enter the User Settings by pressing the Power on/off button followed within 5 seconds by pressing the menu button
- While in the User Settings the Power on/off Button on the front panel will be red
- The User Settings will overlay on top of live video from the last tuned channel

Pace User Settings

- Navigate thru the User Settings by using the up/down navigation arrows on remote control
- White highlight will indicate current sub-menu selection
- Press ok/select on remote to enter sub-menus



HD User Settings Sub-Menus

- TV Aspect Ratio
- TV Display Capability
- Auto Pillarbox
- Closed Captions
- Front Panel Brightness
- HDMI Settings
- Language Settings
- Restore Defaults




TV Aspect Capability

- TV Aspect Ratio (width to height ratio) is set to 16:9 by default
- To change to 4:3 arrow up and press the select/ok button
- Use the left navigation arrow to exit TV Aspect Ratio



TV Display Capabilities – Resolution Settings

- There are six display settings: 1080p30, 1080p24, 1080i, 720p, 480p & 480i.
- To change display settings, navigate to selected setting and press select / OK on the RCU.
- 720p is set to NO by default.
- 1080p30 and 1080p24 are pass through only when connected via HDMI

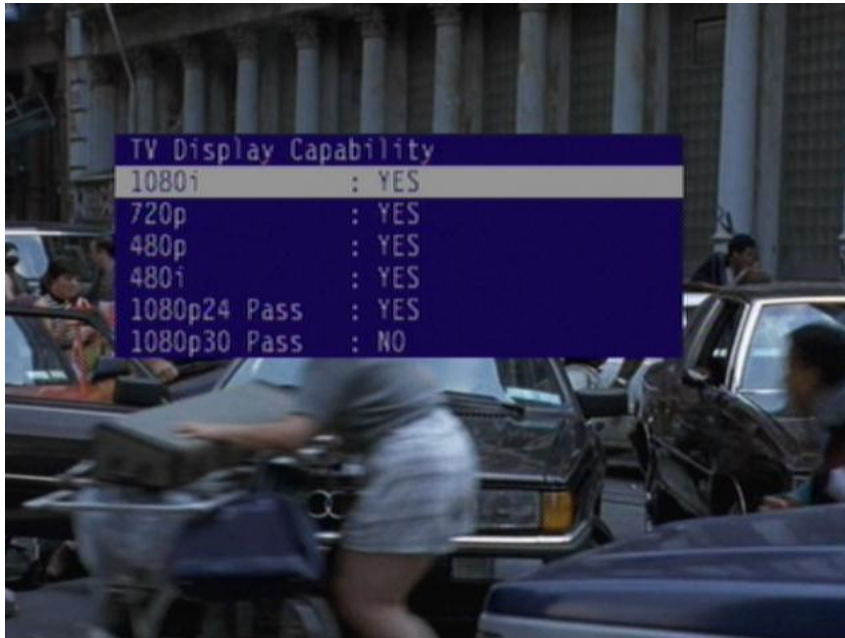

Auto Pillarbox

- Allows customer to choose if 4:3 picture are output stretched
- Or 'Pillar bars' are applied and 4:3 pictures are not distorted
- Auto Pillarbox is set to NO by default



Closed Captions

- Activate closed captions by selecting CC :ON while on CC press the ok/select button on the remote to change from OFF to ON
- Closed Captions are OFF by default
- Viewer can configure captions thru Configure Captions Menu



Configure Captions

- CC appearance can be configured thru the Configure Captions Menu, to enter select ok/select while on Configure Captions
- To configure captions CC must be ON in the Power Menu
- Caption Style must be changed from Program to Viewer in order for changes to be implemented on live TV





Configure Captions - Size

- Captions can be configured into three different sizes (small, medium & Large)
- Toggle between the sizes by pressing the ok/select button
- Caption sizes is set to Auto (medium) by default



Configure Captions

- Font, Character Color and Shading appearance be configured
- Background Color and Shading can also be configured to the users selected choice
- Select Reset Defaults to restore all default settings

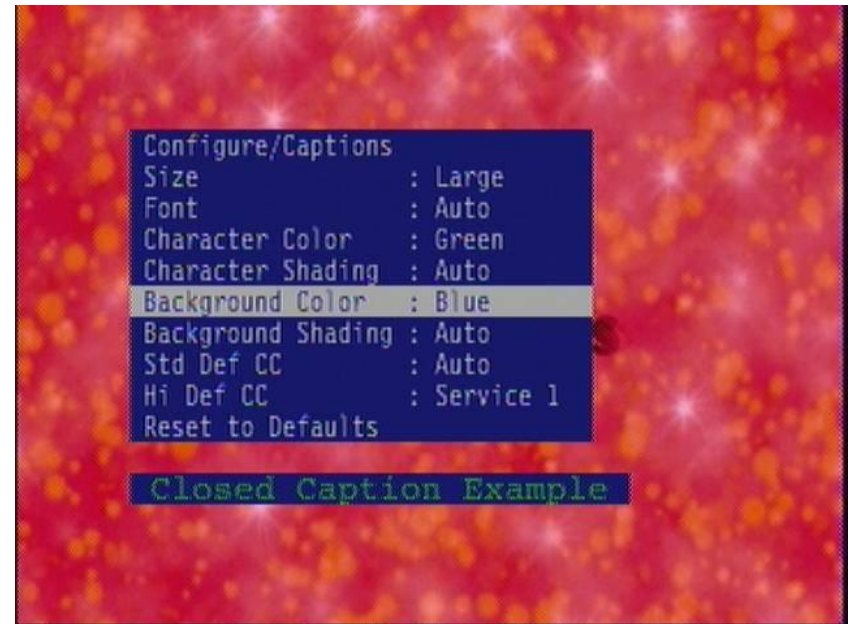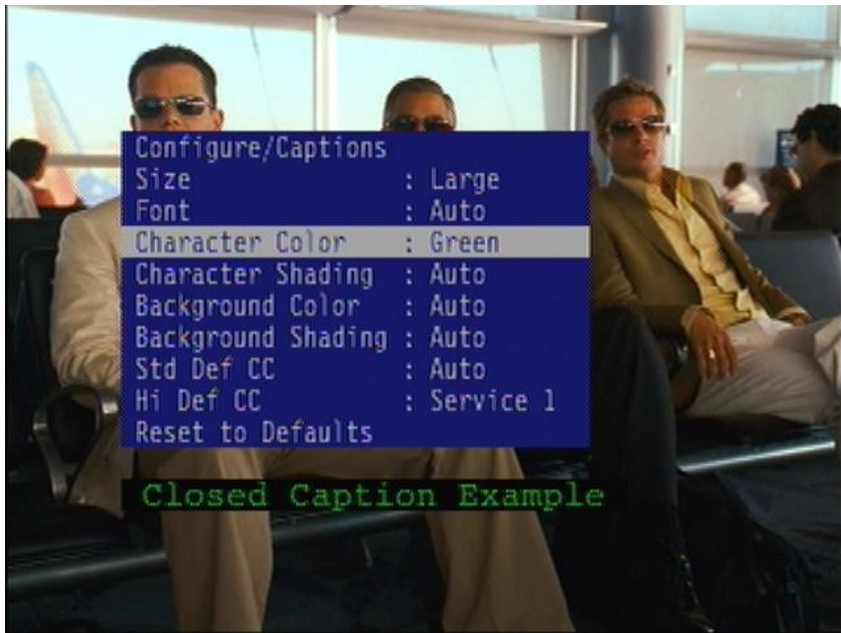

Front Panel Brightness & IR Receive

- Front Panel Brightness Settings can be configured thru Front Panel Brightness Settings
- Standby is to set the Brightness level while the unit is turned off
- Viewing TV Level controls the Brightness level while the unit is on



HDMI Settings – Audio Output Mode

There are three Audio Output Settings, Auto, L-PCM & Pass-Thru

- Auto – Will automatically select the correct audio configuration
- L-PCM – Linear Pulse Code Modulation
- Pass-Thru – Program audio will pass-thru to the set-top



Language Settings

- Allows the HD User Settings to be viewed in four languages
- English, Spanish, French, and Portuguese are available
- English is the default language setting in the HD User Settings




Language Settings

- All HD User Setting Menus will default to the new language selected
- Only the HD User Settings are changed to the new language



Restore Defaults

- Restore Defaults will reset all Power Menu default settings
- Enter Restore Default and Press OK to Confirm

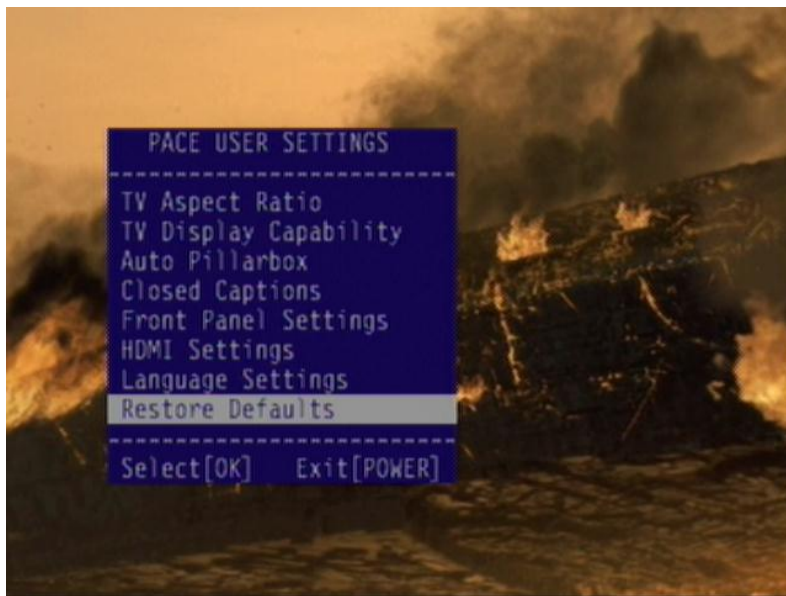



www.pace.com